





K120-EX FULLY RUGGED TABLET

- ATEX/IECEx Zone2/22 certified for hazardous locations
- 11thGeneration Intel[®] Core[™] i7 / i5 vPro[®] Processor
- 12.5" FHD LumiBond display with Getac sunlight readable technology (1,200 nits)
- Enhanced enterprise security with optional Intel vPro®, Windows Hello face-authentication camera and multi-factor authentication options














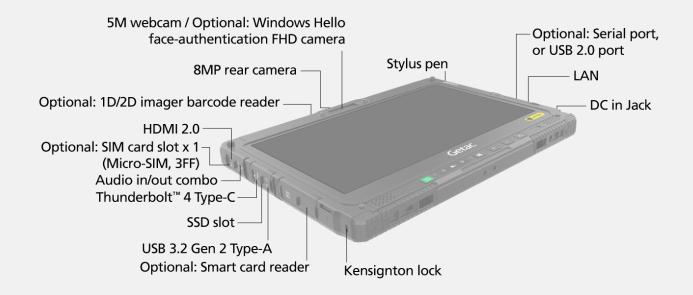

SPECIFICATIONS

Generation

G2-R

Operating System Windows 11 Pro

Mobile Computing Platform

Intel® Core™ i5-1135G7 Processor Max. 4.2GHz with Intel® Turbo Boost Technology - 8MB Intel® Smart Cache

Platform options: Intel®Core™ i5-1145G7 vPro® Processor Max. 4.4GHz with Intel®Turbo Boost Technology - 8MB Intel® Smart Cache Intel® Core™ i7-1165G7 Processor Max. 4.7GHz with Intel® Turbo Boost Technology - 12MB Intel® Smart Cache

Intel® Core™ i7-1185G7 vPro® Processor Max. 4.8GHz with Intel® Turbo Boost Technology - 12MB Intel® Smart Cache

VGA Controller

Intel® Iris® Xe Graphics

Display

12.5° Wide Viewing Angle TFT LCD FHD (1920 x 1080) 1,200 nits LumiBond display with Getac sunlight readable technology

Storage & Memory

16GB DDR4 Optional: 32GB / 64GB DDR4

256GB PCIe NVMe SSD Optional: 512GB / 1TB / 2TB PCIe NVMe SSD

Keyboard

Power button 5 tablet programmable buttons

Pointing Device

Touchscreen Dual mode touchscreen (multi-touch and digitizer)

Expansion Slot

Optional: 1D/2D imager barcode reader Optional: Serial port (9-pin; D-sub), or USB 2.0 port

I/O Interface

I/O Interface

SM webcam x 1 i

8M pixels auto focus rear camera x 1

Audio in/out combo x 1

DC in Jack x 1

USB 3.2 Gen 2 Type-A x 1

Thunderbolt™ 4x 1

LAN (RJ-45) x 1

HDMI 2.0 x 1

Optional: SIM card slot x 1 (Micro-SIM, 3FF) ii

Optional: Windows Hello face-authentication
FHD camera (front-facing) x 1 ii

Communication Interface

Interval of the Interval of Interval o

Security Feature

TPM 2.0

Kensington lock
Optional: Intel[®] vPro[®] Technology
Optional: Smart card reader or HF RFID reader ^{vi}
Optional: Windows Hello face-authentication
FHD camera (front-facing) ⁱ

AC adapter (90W, 100-240VAC, 50/60Hz) Li-ion battery (11.1V, typical 2100mAh; min. 2040mAh) x 2

Dimension (W x D x H) & Weight 329.5 x 238 x 24mm (12.97" x 9.37" x 0.94") 1.76kg (3.88lbs)^{vii}

Rugged Feature

MIL-STD-810H certified IP66 certified Vibration & 6ft (1.8m) drop resistant viii ATEX & IECEx certified

Environmental Specification

Temperature *:
- Operating: -29°C to 63°C / -20°F to 145°F
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH, non-condensing

Explosion Protection

ATEX/IECEx Zone 2/22 Ex II 3G Ex ic op is IIC T4 Gc Ex II 3D Ex ic op is IIIB T130°C Dc

Pre-installed Software

Getac Utility
Getac Camera
Getac Geolocation
Getac Barcode Manager *
Getac Driving Safety Utility (trial version)
Getac RevWedge Barcode Reader Utility (trial version)
Optional: Absolute Persistence *

Optional software

Getac Driving Safety Utility Getac KeyWedge Barcode Reader Utility Getac Device Monitoring System (GDMS) Getac VGPS Utility ^{xi}

Accessories

Battery (11.1V, typical 2100mAh; min. 2040mAh) AC adapter (90W, 100-240VAC) Digitizer pen

Optional:

Optional:
Battery
(11.1V, typical 2100mAh; min. 2040mAh)
Multi-Bay charger (Dual-Bay)
Multi-Bay charger (Eight-Bay)
AC adapter (90W, 100-240VAC)
Digitizer pen with tether
Anti-static protection film
Rotating hand strap with kickstand
Shoulder strap (2-point)
Spare SSD kit

Bumper-to-Bumper warranty

Bumper-to-Bumper warranty
Accidents can take your equipment out of
service when you least expect it, especially in a
rugged environment, which can cause costly
equipment downtime.
That is why Getac has introduced accidental
damage as standard under our Bumper-to-Bumper
warranty, to help minimize your enterprise IT costs.
Bumper-to-Bumper is your hassle-free
guarantee. That means you can depend on us
to have your unit back in service within days.

Standard

3 years Bumper-to-Bumper

K120-EX FULLY RUGGED TABLET

- 5M webcam and optional Windows Hello face-authentication FHD camera (front-facing) are mutually exclusive options.
- Units with 4G LTE option comes with an embedded SIM II. card slot.
- card slot.

 Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is
- operating in the area.

 Dedicated GPS is mutually exclusive with 4G LTE mobile broadband. Supports GPS and Glonass.
- Units with 4G LTE option comes with an embedded SIM card slot.
- Smart card reader and HF RFID reader are mutually exclusive options.
- Weight and dimensions vary from configurations and optional accessories.
- Drop test results vary from configurations and optional accessories. Tested by an independent third-party test lab following MIL-STD-810H.
- Available when barcode reader option is selected.
- Models require either embedded or standalone GPSmodule. XI.
- One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers. XII.
- XIII. Support GPS, GLONASS, Galileo, BeiDou and QZSS.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.



Getac House, Stafford Park 12, Telford, Shropshire TF3 3BJ, United Kingdom Tel: +44 (0) 1952 207 222 Sales-Getac-UK@getac.com | www.getac.com/en/

Copyright © 2023 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved. Information provided herewith is for reference only, available specification shall be subjected to quotation by request.